



Highly Flexible

Minimal Set Up Times

Simple Operation

High Feeder Density

ESD Protected

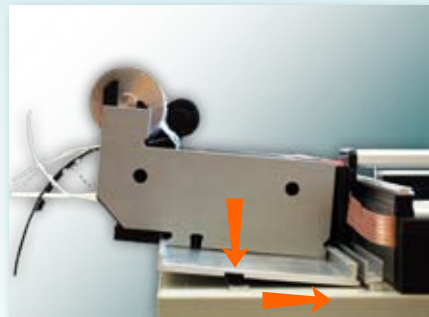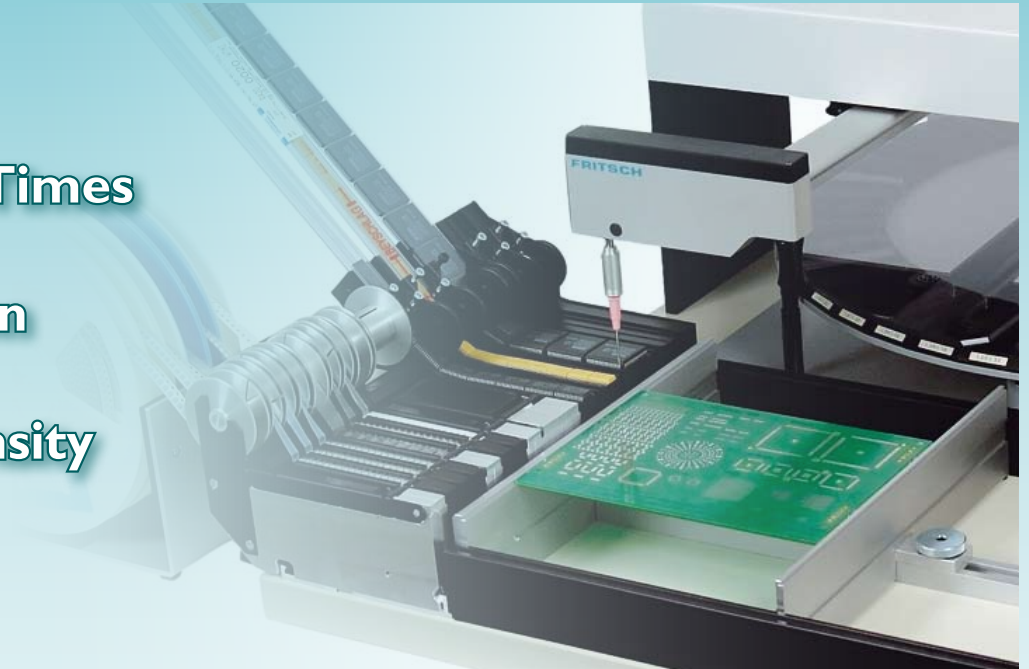

Fritsch GmbH
Bestückungs- und Montagesysteme
Kastler Straße 11
D-92280 Kastl-Utzenhofen

Tel. +49(0) 9625-9210-0
Fax +49(0) 9625-9210-49

www.fritsch-smt.com
info@fritsch-smt.com

CLASSIC

Feeder and Rail System

All FRITSCH Manipulators are equipped with the FRITSCH Rail System.

Highly Flexible

Based on Mounting Rails, many different feeder arrangements can be set up. Users can therefore choose almost any imaginable combination of tape, stick and other feeders.

Minimal Set Up Times

The Plug & Play change over of the FRITSCH Rail System reduces the set up times to a minimum.

Simple Operation

Changing and replacing of individual Mounting Rails, too, is very easy. Even single feeders can be changed in just a moment. Lift – Pull out – Remove

High Feeder Density

The Mounting Rails accommodate feeders without the need to keep to predetermined positions. This allows the highest packing density. The feeder widths are also kept to a minimum to make the best use of the available space. An 8 mm Tape Feeder, for example, only needs 11 mm width on a Mounting Rail.

ESD Protected

Our stationary, as well as our dynamic feeders, are fully conductive.

IC-Dispenser




- 942.208** IC-Dispenser for SO 8, SO 14, SO 16.
Tube width 7,9 mm. Overall width 15 mm.
- 942.220** IC-Dispenser for PLCC 20
Tube width 12,5 mm. Overall width 20 mm.
- 942.228** IC-Dispenser for SO 8L, SO 16L, SO 20L, SO 24L, SO 28L, VSO 40 packages, PLCC 28.
Tube width 15,4 mm. Overall width 22 mm.
- 942.244** IC-Dispenser for PLCC 44.
Tube width 20,1 mm. Overall width 27 mm.
- 942.252** IC-Dispenser for PLCC 52.
Tube width 22,6 mm. Overall width 30 mm.
- 942.268** IC-Dispenser for PLCC 68.
Tube width 27,7 mm. Overall width 35 mm.
- 942.284** IC-Dispenser for PLCC 84.
Tube width 32,8 mm. Overall width 40 mm.
- 942.901** IC-Dispenser. Custom made.

Tapefeeder



- 943.008** Tapefeeder for 8 mm SMD Tape. Overall width 11 mm.
- 943.012** Tapefeeder for 12 mm SMD Tape. Overall width 14 mm.
- 943.016** Tapefeeder for 16 mm SMD Tape. Overall width 19 mm.
- 943.024** Tapefeeder for 24 mm SMD Tape. Overall width 27 mm.
- 943.032** Tapefeeder for 32 mm SMD Tape. Overall width 36 mm.

Mounting Rail

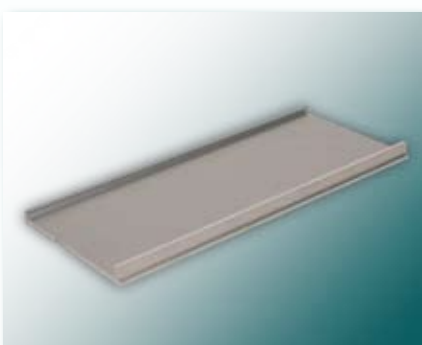

- 940.255** Mounting Rail 255 mm.
- 940.306** Mounting Rail 306 mm.
- 940.426** Mounting Rail 426 mm.
- 940.470** Mounting Rail, rear 470 mm.
- 940.570** Mounting Rail, rear 570 mm.

Feeder and Rail System

Reel Support Stand

943.101 Reel Support Stand
For all SMD Tape widths, eg for five 8 mm reels.



943.103 Reel Support Stand for reels 100mm OD.




943.102 Reel Support Stand for reels 330mm OD.



Other Support Stand and Accessories

940.312 Mounting Rail with 3x12 LEDs
For use with SM. For three Rail Units 922.110 or 922.310.

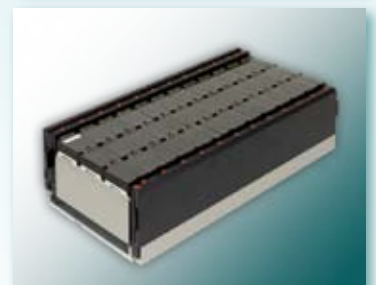

941.101 Tape Strip Dispenser. Support with Rail Unit **941.124**
with 24 Mini Feeders for Tape Strips.

941.124 Rail Unit with 24 Mini Feeder for Tape Strips.



80.0176.00 Minifeeder for Tape Strings, separate.

940.701 End Support for TF943 on Mounting Rail.



Subject to change